



## Model 771



### Features

- Large Bore Size to 1.875" or 43 mm
- Fits NEMA Size 182TC Thru 256TC Motor Faces (8.5" AK)
- Incorporates Opto-ASIC Technology
- Resolutions to 4096 PPR


The Model 771 C-face encoder is a rugged, high resolution encoder designed to mount directly on NEMA C-face motors. Both sides of the encoder are C-face mounts, allowing additional C-face devices to be easily mounted. Many competitive C-face units are kit type encoders, but the Model 771 contains precision bearings and an internal flex mount that virtually eliminates encoder failures and inaccuracies induced by motor shaft runout or axial endplay. The advanced Opto-ASIC design provides superior noise immunity necessary for many industrial applications. This encoder is ideal for applications using induction motors and flux vector control. A Thru-Bore design allows fast and simple mounting of the encoder directly to the accessory shaft or drive shaft of a motor using a NEMA standard motor face (sizes 182TC - 256TC). The tough, all metal housing resists the vibration and hazards of an industrial environment.

### Common Applications

Motor Feedback, Velocity & Position Control, Servo Control Systems, Assembly & Specialty Machines, Elevator Controls

## Model 771 Ordering Guide

Blue type indicates price adder options. Not all configuration combinations may be available. Contact Customer Service for details.

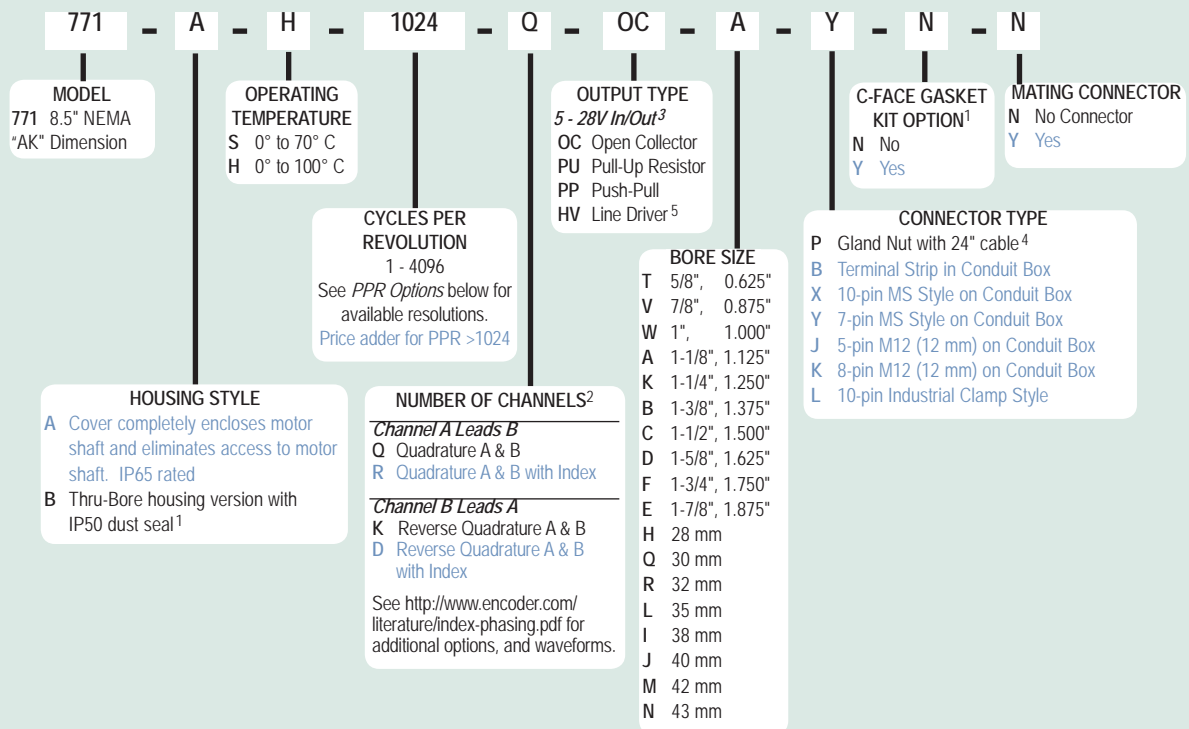

### Model 771 PPR Options

0060	0100	0120	0240	0250	0256
0500	0512	0600	1000	1024	2048
2500	4096				

Contact Customer Service for other disk resolutions;  
not all disk resolutions available with all output types

### NOTES:

- 1 Thru-Bore version may be IP65 sealed if mounted between two C-face devices with optional gasket kit. Select 'Yes' under C-face Gasket Kit Option.
- 2 Contact Customer Service for index gating options.
- 3 5 to 24 Vcc max for high temperature option.
- 4 For non-standard cable lengths, add a forward slash (/) plus cable length expressed in feet. Example: P/6 = 6 feet of cable.
- 5 Not available with 5-pin M12 connector. Available with 7-pin MS connector only without Index Z.



## Model 771

### Model 771 Specifications

#### Electrical

Input Voltage.....	4.75 to 28 Vcc max for temperatures up to 70° C 4.75 to 24 Vcc for temperatures between 70° C to 100° C
Input Current.....	100 mA max with no output load
Input Ripple .....	100 mV peak-to-peak at 0 to 100 kHz
Output Format .....	Incremental- Two square waves in quadrature with channel A leading B for clockwise shaft rotation, as viewed from the mounting face. See <i>Waveform Diagrams</i> below.
Output Types .....	Open Collector- 100 mA max per channel Pull-Up- 100 mA max per channel Push-Pull- 20 mA max per channel Line Driver- 20 mA max per channel (Meets RS 422 at 5 Vcc supply)
Index .....	Once per revolution. 0475 to 4096 PPR: Gated to output A 0001 to 0474 PPR: Ungated See <i>Waveform Diagrams</i> below.
Max Frequency.....	200 kHz
Noise Immunity.....	Tested to BS EN61000-4-2; IEC801-3; BS EN61000-4-4; DDENV 50141; DDENV 50204; BS EN55022 (with European compliance option); BS EN61000-6-2: BS EN50081-2
Symmetry .....	180° (±18°) electrical
Quad. Phasing.....	90° (±22.5°) electrical
Min. Edge Sep.....	67.5° electrical
Rise Time.....	Less than 1 microsecond


#### Mechanical

Max Shaft Speed.....	3500 RPM. Higher shaft speeds may be achievable, contact Customer Service. 6000 RPM for 1.125", 1.250", 1.375", 28 mm, 30 mm, 32 mm bore diameter
Bore Size.....	0.625", 0.875", 1.00", 1.125", 1.250", 1.375", 1.500", 1.625", 1.750", 1.875", 28 mm, 30 mm, 32 mm, 35 mm, 38 mm, 40 mm, 42 mm, and 43 mm
User Shaft Tolerances	
Radial Runout .....	0.005"
Axial Endplay .....	±0.1"
Moment of Inertia .....	3.3 x 10 <sup>-3</sup> oz-in-sec <sup>2</sup> typical
Electrical Conn .....	Gland nut with 24" cable (foil and braid shield, 24 AWG conductors), Terminal Strip in conduit box, 7- or 10-pin MS Style, 5- or 8-pin M12 (12 mm), 10-pin Industrial Clamp
Housing.....	All metal construction
Mounting.....	NEMA 182TC-256TC (8.5" AK)
Weight.....	7.0 lb typical


#### Environmental

Operating Temp.....	0° to 70° C for standard models 0° to 100° C for high temperature option
Storage Temp .....	-25° to 100° C
Humidity.....	98% RH non-condensing
Vibration.....	10 g @ 58 to 500 Hz
Shock.....	50 g @ 11 ms duration
Sealing.....	IP65 for Option A housing style with gasket kit IP50 for Option B housing style


### Model 771 With Gland Nut Cable (P)

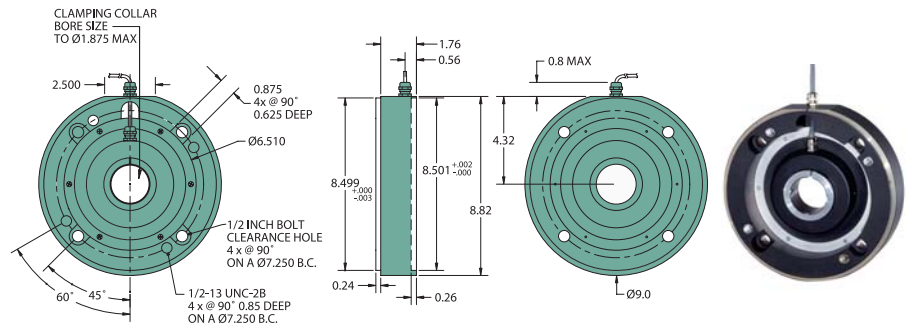

### Model 771 With Conduit Box (B, X, Y, J, K)

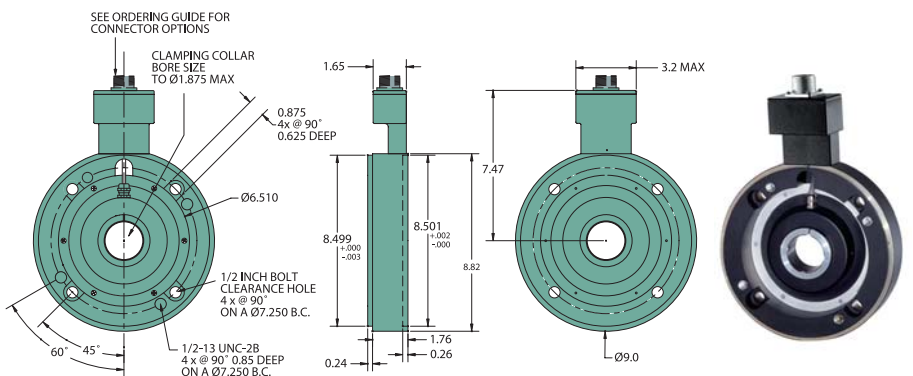

#### Optional Housing Style (A) Protective Cover

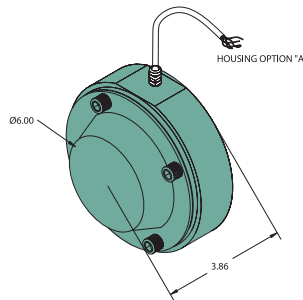


CONNECTOR TYPE	HEIGHT
6- or 7-PIN MS	0.67"
10-PIN MS	0.90"
5- or 8-PIN M12	0.50"

All dimensions are in inches with a tolerance of ±0.005" or ±0.01" unless otherwise specified


### Waveform Diagrams

#### Line Driver and Push-Pull

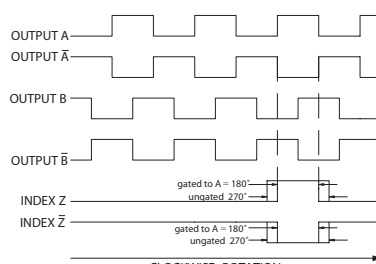

NOTE: ALL DEGREE REFERENCES ARE ELECTRICAL DEGREES  
NOTE: PUSH-PULL OUTPUT DOES NOT INCLUDE COMPLEMENTARY CHANNELS

#### Open Collector and Pull-Up

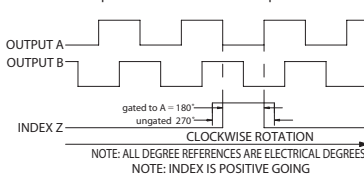

NOTE: ALL DEGREE REFERENCES ARE ELECTRICAL DEGREES  
NOTE: INDEX IS POSITIVE GOING

### Wiring Table

Function	Gland Cable Color	5-pin M12 <sup>1</sup> PU, PP, OC	8-pin M12 <sup>2</sup>	10-pin MS	7-pin MS HV	7-pin MS PU, PP, OC	Term. Block	10-pin Indust. Clamp
Com	Black	3	7	F	F	F	2	1
+VDC	Red	1	2	D	D	D	1	6
A	White	4	1	A	A	A	3	3
A'	Brown	---	3	H	C	---	4	8
B	Blue	2	4	B	B	B	5	2
B'	Violet	---	5	I	E	---	6	7
Z	Orange	5	6	C	---	C	7	4
Z'	Yellow	---	8	J	---	---	8	9
Shield	Bare <sup>1</sup>	---	---	---	---	---	---	---
Case	---	---	---	G <sup>2</sup>	G <sup>2</sup>	G <sup>2</sup>	9 <sup>3</sup>	10 <sup>3</sup>

<sup>1</sup>CE Option: Cable shield (bare wire) is connected to internal Case

<sup>2</sup>CE Option: Pin G is connected to Case

Non CE Option: Pin G has No Connection

<sup>3</sup>CE Option: Pin 10 is connected to Case

Non CE Option: Pin has No Connection

<sup>4</sup>CE Option: Read Technical Bulletin "TB111"